




BF-2

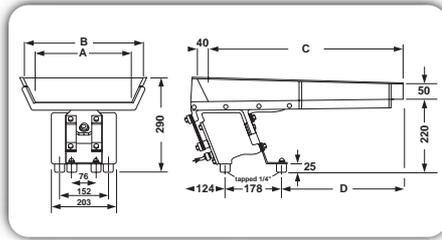

BF-2

| | | |
|-----------|----------------------------------|----------|
| CAPACITY | 6.5 TONNES/HOUR | |
| | ON SAND AT 1600kg/m ³ | |
| VOLTAGE | 230v | 110v |
| CURRENT | 2.0 AMPS | 4.0 AMPS |
| FREQUENCY | 50 Hz or 60 Hz | |
| | SINGLE PHASE | |
| WEIGHT | NET | SHIPPING |
| | kgs | 30 |

Maximum Trough Weight - 10kg

Dimensions (mm)

| A | B | C | D |
|-----|-----|-----|-----|
| 200 | 270 | 762 | 465 |
| 250 | 320 | 762 | 465 |
| 300 | 370 | 600 | 385 |

F-010/FH-010

| | | |
|-----------|----------------------------------|------------|
| CAPACITY | 3.5/4 TONNES/HOUR | |
| | ON SAND AT 1600kg/m ³ | |
| VOLTAGE | 230v | 110v |
| CURRENT | 1/1.25 AMPS | 2/2.5 AMPS |
| FREQUENCY | 50 Hz or 60 Hz | |
| | SINGLE PHASE | |
| WEIGHT | NET | SHIPPING |
| | kgs | 15 |

Maximum Trough Weight - F010 5.5kg

F-010 Dimensions (mm)


| A | B | C | D |
|-----|-----|-----|-----|
| 200 | 270 | 450 | 320 |
| 150 | 220 | 500 | 345 |
| 100 | 170 | 670 | 470 |

FH-010 Dimensions (mm)

| | | | |
|-----|-----|-----|-----|
| 200 | 270 | 500 | 345 |
| 150 | 320 | 500 | 345 |



F-010/FH-010

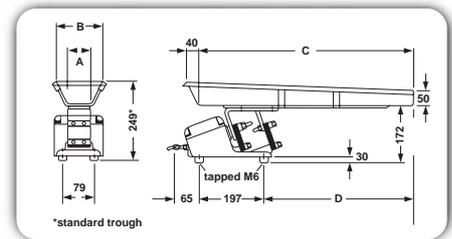

*standard trough



F-T01

F-T01

| | | |
|-----------|----------------------------------|----------|
| CAPACITY | 2 TONNES/HOUR | |
| | ON SAND AT 1600kg/m ³ | |
| VOLTAGE | 230v | 110v |
| CURRENT | 0.4 AMPS | 0.8 AMPS |
| FREQUENCY | 50 Hz or 60 Hz | |
| | SINGLE PHASE | |
| WEIGHT | NET | SHIPPING |
| | kgs | 11.5 |

Maximum Trough Weight - 2.7kg

Dimensions (mm)

| A | B | C | D |
|-----|-----|-----|-------|
| 150 | 220 | 300 | 187.5 |
| 100 | 170 | 450 | 334.5 |
| 75 | 145 | 450 | 334.5 |

